

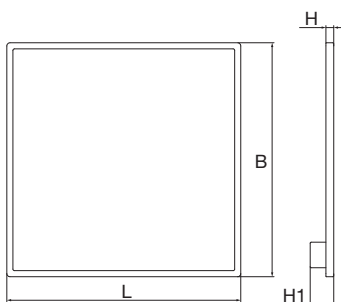


# PaneLED


Recessed LED luminaires – mounting into ceiling modules M600

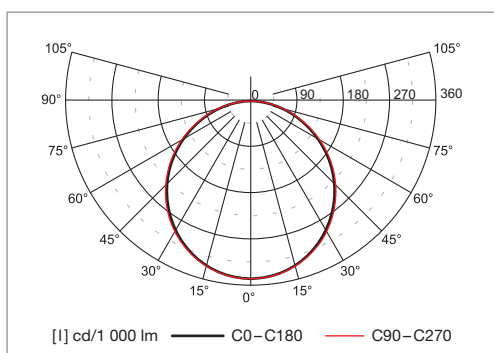

## PENDANT MOUNTING

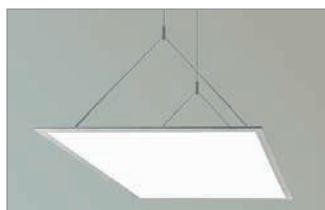

## RECESSED MOUNTING



## BOX FOR SURFACED MOUNTING



### Material:

- body: aluminum frame
- diffuser: opaline PMMA

**Ambient temperature:** -20 ÷ 40°C

**Degree of protection:** IP40

**Rated voltage:** 230 V/50 Hz

**Control gear:** LED driver

**Service life:** 35 000 hours

**Mounting:** recessed mounting in ceiling module M600, ceiling or pendant mounting

**Accessories: (supplied with the luminaire)**

Wire pendants – 2 pcs

**Accessories: (to be ordered separately)**

70033 – wire pendants

70035 – box for surfaced mounting (600x600)

**Application:**

offices, lecture halls, vestibules, schools, hotels, shopping centers, large and small

Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	L × B × H × H1 (mm)	Kg
A45-10173CM	45	5000	111	4000	80	595 x 595 x 9 x 60	3,7