
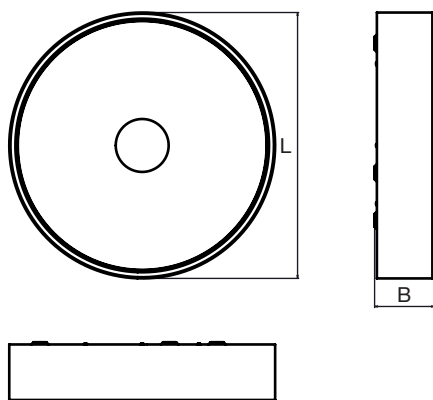


Rondo LED

Ceiling and suspended LED luminaires



Material:

- body: painted steel sheet
- color: grey (RAL 9006)
- diffuser: frosted acrylic or microprismatic optics

Ambient temperature: $-20 \div 25^{\circ}\text{C}$

Degree of protection: IP20

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Mounting: surfaced or suspended on ceiling

Accessories: (to be ordered separately)

99-0157 – wire suspensions, transparent power cable $3 \times 0.75 \text{ mm}^2$ (120 cm) – set for one luminaire

99-0158 – wire suspensions, transparent power cable $5 \times 0.75 \text{ mm}^2$ (120 cm) – set for one luminaire

99-0159 – wire suspensions, transparent power cable $7 \times 0.75 \text{ mm}^2$ (120 cm) – set for one luminaire

Application: shops, stairways, corridors in shopping centers, vestibules, hotels and restaurants

| Code | Optics | Absorption W | Lum. flux (lm) | lm/W | Color temp. K | Ra | EEC | L × B (mm) | Kg |
|-------------|--------------------------|--------------|----------------|------|---------------|-----|-----|------------|-----|
| A17-10061CM | frosted diffuser | 36 | 3 300 | 92 | 4 000 | >80 | A+ | 352 × 79 | 3.0 |
| A17-10061CW | micro-prism optic system | 36 | 3 200 | 89 | 4 000 | >80 | A+ | 352 × 79 | 3.0 |