



PaneLED

Recessed LED luminaires – mounting into ceiling modules M600

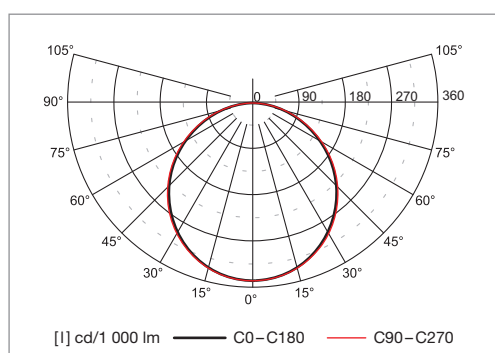

Material:

- body: aluminum frame
- diffuser: opaline PMMA

Ambient temperature: $-20 \div 40^{\circ}\text{C}$

Degree of protection: IP40

Rated voltage: 230 V/50 Hz

Control gear: LED driver

Service life: 35 000 hours

Mounting: recessed mounting in ceiling module M600, ceiling or pendant mounting

Accessories: (supplied with the luminaire)

Wire pendants – 2 pcs

Accessories: (to be ordered separately)


70033 – wire pendants

20097 – box for surfaced mounting (600x600)

Application:

offices, lecture halls, vestibules, schools,
hotels, shopping centers, large and small

PENDANT MOUNTING



RECESSED MOUNTING



BOX FOR SURFACED MOUNTING



Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	L × B × H × H1 (mm)	Kg
A45-10173CM	45	5000	111	4000	80	595 x 595 x 9 x 60	3,7