


X-Spike LED

Outdoor LED luminaire



Material:
 • color: black
Degree of protection: IP65, IK06
Working temp.: -20 ÷ +40°C
Rated voltage: 230 V/50 Hz
Life: 25.000h
Beam angle: 25°
Mounting: pin into the ground
Application: gardens, porches

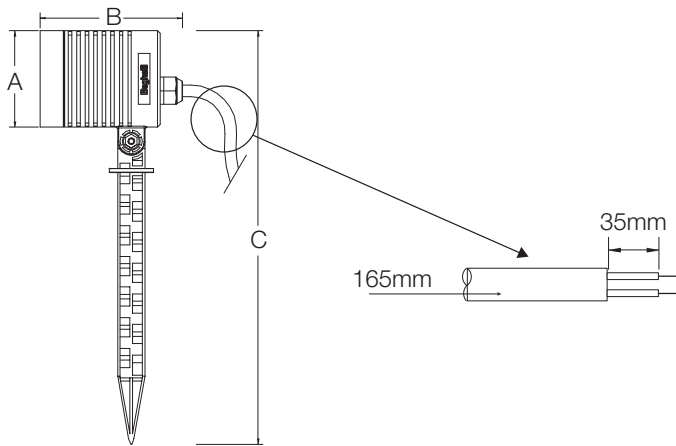

W	• Dimensions (mm) •		
	A (∅)	B	C
4	44	63	188
6	56,5	84	243

X-SPIKE ECOLED

Code	EAN	W	Candelas	Lum. flux (lm)	Color temp. K	lm/W	Dimensions	CRI	Package sing./min./multipack	EEC
86120	8002219735782	4	600	200	3000	50	∅44x63x188	>80	1/10/40	A
86121	8002219735799	4	600	200	4000	50	∅44x63x188	>80	1/10/40	A
86122	8002219735805	6	1800	420	3000	70	∅56,5x84x243	>80	1/10/40	A+
86123	8002219735812	6	1800	420	4000	70	∅56,5x84x243	>80	1/10/40	A+