


PaneLED

Recessed LED luminaires – mounting into ceiling modules M600

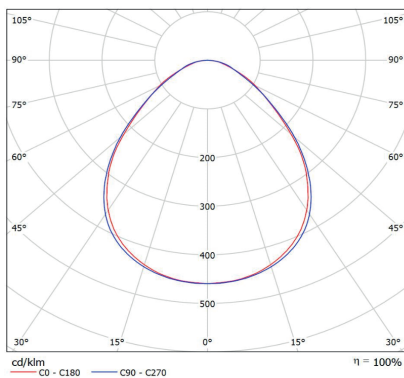

Material:

- body: aluminum frame
- diffuser: opaline PMMA

Ambient temperature: -20 ÷ 40°C

Degree of protection: IP40, IP65

Rated voltage: 230 V/50 Hz

Control gear: LED driver, the luminaires are offered also in emergency version

Service life: 30 000 hours

Mounting: recessed mounting in ceiling module M600, ceiling or pendant mounting

Accessories: (to be ordered separately)

70033 – suspension wire

70048 – mounting brackets for recessed installation

20097 – adapter for surfaced mounting 600 × 600

20100 – adapter for surfaced mounting 1 200 × 300

8382 – dimmable driver 1-10V for PANE LED absorption 36W

8383 – dimmable driver 1-10V for PANE LED absorption 45W

99-0168 – recessed frame for plaster ceiling 600x600

99-0169 – recessed frame for plaster ceiling 1200x300

Application: schools, hotels, shopping centers, large and small offices, lecture halls, vestibules

Power* W	Code	Article	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	Dimensions (mm)	Kg
4×18	70040	PAN LED 600x600	36	3 000	83	3 000	>80	595 × 595 × 9 × 60	3.7
4×18	70041	PAN LED 600x600	36	3 000	83	4 000	>80	595 × 595 × 9 × 60	3.7
2×36	70042	PAN LED 1200x300	36	3 000	83	3 000	>80	295 × 1 195 × 9 × 60	3.7
2×36	70043	PAN LED 1200x300	36	3 000	83	4 000	>80	295 × 1 195 × 9 × 60	3.7
4×18	70044	PAN LED 600x600	45	4 150	92	3 000	>80	595 × 595 × 9 × 60	3.7
4×18	70045	PAN LED 600x600	45	4 275	95	4 000	>80	595 × 595 × 9 × 60	3.7
2×36	70046	PAN LED 1200x300	45	4 150	92	3 000	>80	295 × 1 195 × 9 × 60	3.7
2×36	70047	PAN LED 1200x300	45	4 275	95	4 000	>80	295 × 1 195 × 9 × 60	3.7

* Indicative power just for fluorescent fixtures comparison purpose. **Basic range.**

Power* W	Code	Article	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	Dimensions (mm)	Kg
4×18	70060	PAN LED 600x600 IP65	36	4 000	111	3 000	>80	595 × 595 × 9 × 60	3.7
4×18	70061	PAN LED 600x600 IP65	36	4 000	111	4 000	>80	595 × 595 × 9 × 60	3.7
2×36	70062	PAN LED 1200x300 IP65	36	4 000	111	3 000	>80	295 × 1 195 × 9 × 60	3.7
2×36	70063	PAN LED 1200x300 IP65	36	4 000	111	4 000	>80	295 × 1 195 × 9 × 60	3.7
4×18	70064	PAN LED 600x600 IP65	45	5 000	111	3 000	>80	595 × 595 × 9 × 60	3.7
4×18	70065	PAN LED 600x600 IP65	45	5 000	111	4 000	>80	595 × 595 × 9 × 60	3.7
2×36	70066	PAN LED 1200x300 IP65	45	5 000	111	3 000	>80	295 × 1 195 × 9 × 60	3.7
2×36	70067	PAN LED 1200x300 IP65	45	5 000	111	4 000	>80	295 × 1 195 × 9 × 60	3.7

* Indicative power just for fluorescent fixtures comparison purpose. **Protection degree IP65.**