Instruction manual

Salemo LED











Tel.: +420 531 014 111 Fax: +420 531 014 210 beghelli@beghelli.cz



Recessed LED luminaire

Ord. codes:

A37-10139C* * M - frosted acrylic diffuser
A37-10139C*/LGL W - microprismatic diffuser


A37-10140C* LGL - equipped with emergency LED inverter

A37-10140C*/LGL

A37-10144C* Dimensions:

A37-10144C*/LGL A = 595 mm; B = 595 mm (for versions **A37-10139C* & A37-10140C***)

A = 595 mm; B = 310 mm (for version **A37-10144C***)

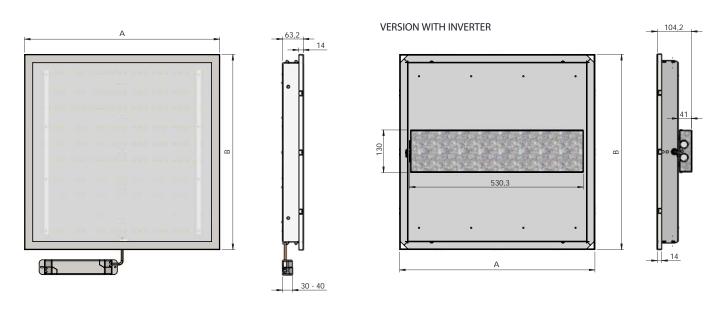

MOUNTING PROCEDURE:

Inlay mounting into ceiling modules M600

- Pull the luminaire through the lower ceiling and place it into the supporting structure.
- Optimal distance between the lower ceiling and the ceiling for mounting is 300 mm.
- Minimal distance between the lower ceiling and the ceiling for mounting should be 200 mm.

TECHNICAL DETAILS:

Rated voltage: 230V, 50Hz

Lamp: LED

Degree of protection: IP40 / IP20

Electrical accident protection class: II. for standard luminaire; I. for luminaire equipped with emergency LED inverter

The luminaire satisfies requirements of all standards in force.

The lighting fixture allows inlay mounting

WARNING:

- Check whether the mains specification satisfies the data mentioned on a luminaire plate before connecting it to the mains.
- Contact the customer service authorised centre for repairs, and insist on using original spare parts only. Not satisfying these instructions could result in loss of luminaire safety or in loss of warranty.
- This luminaire should only be used for a purpose for which it was manufactured. Any other usage shall be assumed to be unsuitable and therefore dangerous. The manufacturer bears no responsibility for any injury caused to persons or animals or for property damages caused by improper, faulty or inadequate usage.
- A luminaire must be disconnected from the mains before any interference with a luminaire, service or maintenance. An expert person, in terms of valid regulations concerning the competence to activities, should only perform these actions.
- The luminaire may only be connected to the mains, whose installation and protection satisfies standards in force.

WARRANTY

All products of the company Beghelli - Elplast, a.s. are made of the highest quality materials, thoroughly tested and guaranteed by the manufacturer to be free of defects in terms of existing legislative regulations. This warranty becomes invalid if mounting is not executed according to the instruction manual, the luminaire is damaged or modified or repaired by an unauthorised service centre of the company Beghelli - Elplast, a.s.

The product cannot be disposed as unsorted municipal waste. It must be collected separately to prevent negative environmental impacts. In accordance with the procedures of Directive 2002/96 and relevant national laws and regulations adopted pursuant to this Directive on the disposal of waste at the end of the life cycle of the product, any violation is sanctioned by law. Please inform yourself about the local separate collection system for electrical and electronic products.

