

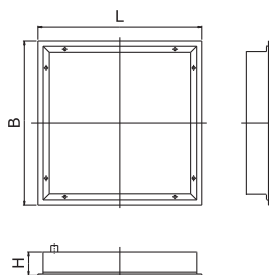


arietis | 36-02

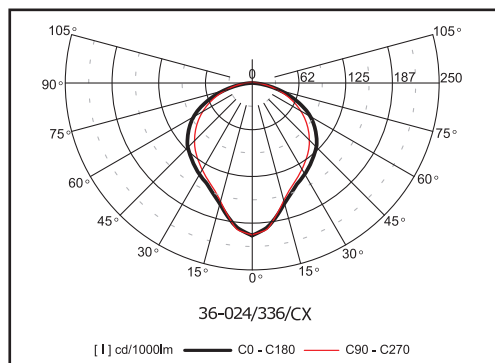

Recessed luminaires IP65 - ceiling systems M600 - inlay mounting

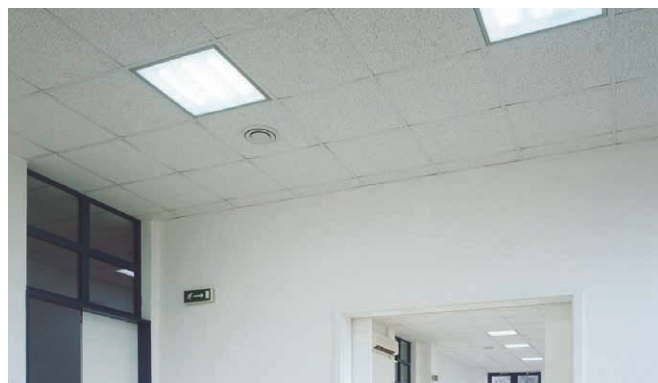

Material:

- body: a steel sheet finished by powder technology varnishing
- color: white RAL 9003
- cover: prismatic

Degree of protection: IP 65

Rated voltage: 230V/50Hz

Control gear: low loss ballast or electronic ballast, dimmable ballast by request;
the luminaires are offered also in emergency version

Mounting: ceiling systems M600 - inlay mounting

Application: hospitals, laboratories, precincts with high humidity and dustiness,
precincts demanding high sanitary codes, operating theaters

| Code | Power | Lamp | Cap | LxBxH (mm) | Module | Kg |
|---------------|-------|----------------|------|--------------|--------|-----|
| 36-023/236/□X | 2x36W | T8 lamp | G13 | 1197x297x110 | M600 | 7,5 |
| 36-023/418/□X | 4x18W | T8 lamp | G13 | 595x595x122 | M600 | 8,7 |
| 36-024/336/□X | 3x36W | comp. fl. lamp | 2G11 | 595x595x122 | M600 | 8,0 |
| 36-024/355/CX | 3x55W | comp. fl. lamp | 2G11 | 595x595x122 | M600 | 8,0 |
| 36-023/128/CX | 1x28W | T5 lamp | G5 | 1197x297x100 | M600 | 5,2 |
| 36-023/135/CX | 1x35W | T5 lamp | G5 | 1497x297x100 | M600 | 6,3 |
| 36-023/228/CX | 2x28W | T5 lamp | G5 | 1197x297x110 | M600 | 7,5 |
| 36-023/235/CX | 2x35W | T5 lamp | G5 | 1497x297x100 | M600 | 8,3 |
| 36-023/414/CX | 4x14W | T5 lamp | G5 | 595x595x122 | M600 | 8,2 |

□ - E (low loss ballast) - C (electronic ballast)