



Pratica Modula

P.MODULA 700 IP65 SA/SE RM



Control system TR

Order code 18661

EAN 8002219886767

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	5.8 W
Control system	TR
Autonomy	1h, 1.5h, 2h, 3h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 3.2V 3Ah
Charging time	12 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	36
Photobiological risk	RG0
Booster battery	RA11f
Colour reflector	White RAL 9003
Colour trim	White RAL 9003
Operation mode	NM/M
Equivalent power	36WGL
Flux SE booster	1000 lm, 750 lm, 600 lm, 400 lm
Flux SA	250 lm
Flux SE	700 lm, 500 lm, 400 lm, 250 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.45
Glow wire strength	850 °C - 30s.
Mounting	Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Track & Rail, Surface/Suspended, Electrified rail, Flush mounting box 3M
Number of Batteries	1
Pictogram included	Yes
Rest mode	Yes
Visibility distance	20 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

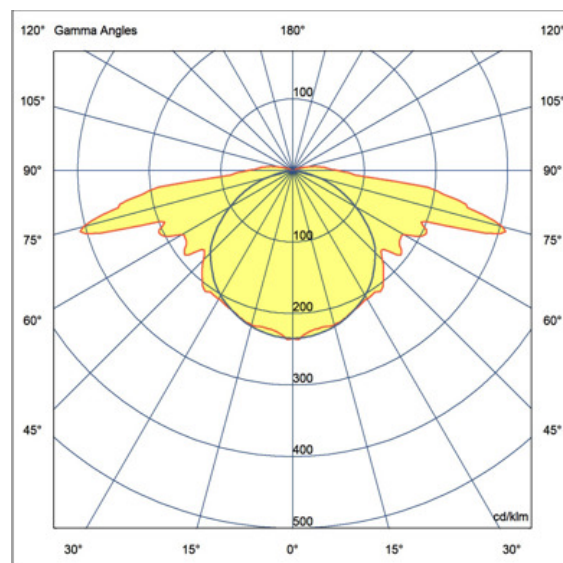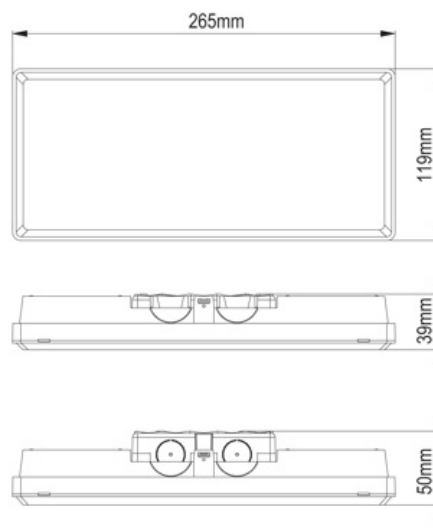

Installation and applications

Environment **Secondary Areas**

Application

**Offices, Escape Routes, Condos,
Residential Areas, Congress Centers,
Hotels, Industrial Areas, Stores, Malls,
Safety Sign**

Mechanical specifications

Height	38 mm
Length	119 mm
Width	265 mm
Weight	0.55 Kg
Cutout length	300 mm
Cutout wide	120 mm
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Lens material	Methacrylate
Reflector material	Polycarbonate
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019, EN 61547:2009, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010

Supplied accessories



18589
STAFFA DERIVAZIONE EASY
BOX



18584
ADESIVI SX/DX/BS/UP
P.MODULA



18598
CORNICE ESTETICA

Accessories



18591
GRIGLIA EM 305X130X100



18587
STAFFA BLINDOLUCE
P.MODULA



19888
MODULO ORMA BOX LED



18581
SCHERMO BAND SX/DX
P.MODULA



3723
GANCIO SOSPENSIONE
4004/PR



18592
KIT IP65 TUBO BOX BASSO
P.MOD



4127
SCHERMO BAND PRATICA
SX/DX



18595
SCHERMO BASSO P.MODULA




4319
KIT BINARIO TRIFASE UP LED



18580
SCAT INCASSO+CORNICE
P.MODULA




18596
SCHERMO ALTO P.MODULA



18599
ADATT INCASSO PRATICA IP65




4128
SCHERMO BAND PRATICA BS



19889
LUCE SOPRAPORTA BOX LED



18594
SCHERMO DX P.MODULA



18583
SCHERMO BAND ALTO
P.MODULA



18593
SCHERMO SX P.MODULA



RA11
BOOSTER AR M LiFe 3.2V 1,5Ah



4129
SCHERMO BAND PRATICA UP



18590
STAFFA 45° P.MODULA



18582
SCHERMO BAND BASSO
P.MODULA



18586
STAFFA CONTROS+CORNICE



18597
TEGOLINO PRO PIOGGIA INOX

Spare parts



415441001
LI-FEPO4 3.2V 3AH 18650