



# Pratica Modula

P.MODULA 1000 IP65 SE RM

## Control system TR

Order code **18670**




EAN 8002219886781

## Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	3.5 W
Control system	TR
Autonomy	1h, 1.5h, 2h, 3h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 3.2V 3Ah
Charging time	12 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	36
Photobiological risk	RG0
Booster battery	RA11f
Colour reflector	White RAL 9003
Colour trim	White RAL 9003
Operation mode	NM
Equivalent power	36WGL
Flux SE booster	1500 lm, 1000 lm, 850 lm, 550 lm
Flux SE	1000 lm, 700 lm, 550 lm, 350 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.41
Glow wire strength	850 °C - 30s.
Mounting	Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Track & Rail, Surface/Suspended, Electrified rail, Flush mounting box 3M
Number of Batteries	1
Rest mode	Yes
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

## Installation and applications

Environment **Secondary Areas**

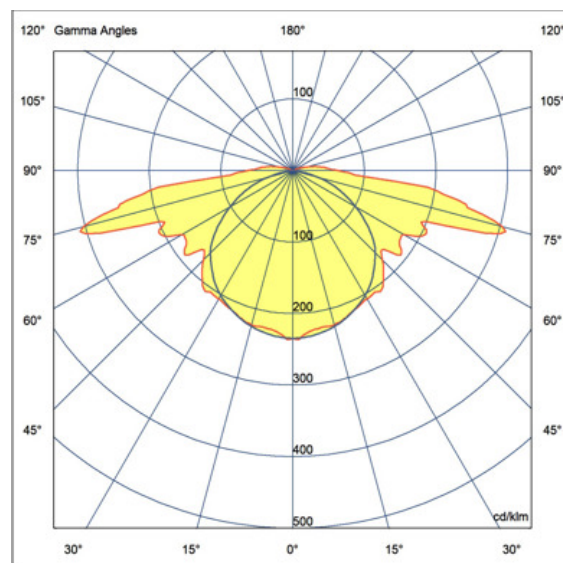

Application

Offices, Escape Routes, Condos,  
Residential Areas, Congress Centers,  
Hotels, Industrial Areas, Stores, Malls,  
Safety Sign

## Mechanical specifications

Height	38 mm
Length	119 mm
Width	265 mm
Weight	0.55 Kg
Cutout length	300 mm
Cutout wide	120 mm
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Lens material	Methacrylate
Reflector material	Polycarbonate
Protection grade IP	IP65
Protection grade IK	IK07

## Certifications and norms

UK SI 2021 No. 1095, EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019, EN 61547:2009, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010

## Supplied accessories



**18598**  
CORNICE ESTETICA



**18589**  
STAFFA DERIVAZIONE EASY  
BOX

## Accessories



**18599**  
ADATT INCASSO PRATICA IP65



**4128**  
SCHERMO BAND PRATICA BS



**19889**  
LUCE SOPRAPORTA BOX LED



**18594**  
SCHERMO DX P.MODULA



**18583**  
SCHERMO BAND ALTO  
P.MODULA



**18593**  
SCHERMO SX P.MODULA




**RA11**  
BOOSTER AR M LiFe 3.2V 1,5Ah



**4129**  
SCHERMO BAND PRATICA UP




**18590**  
STAFFA 45° P.MODULA




**18582**  
SCHERMO BAND BASSO  
P.MODULA




**18586**  
STAFFA CONTROS+CORNICE




**18597**  
TEGOLINO PRO PIOGGIA INOX



**18591**  
GRIGLIA EM 305X130X100



**18587**  
STAFFA BLINDOLUCE  
P.MODULA



**19888**  
MODULO ORMA BOX LED



**18581**  
SCHERMO BAND SX/DX  
P.MODULA



**3723**  
GANCIO SOSPENSIONE  
4004/PR



**18584**  
ADESIVI SX/DX/BS/UP  
P.MODULA



**18592**  
KIT IP65 TUBO BOX BASSO  
P.MOD



**4127**  
SCHERMO BAND PRATICA  
SX/DX



**18595**  
SCHERMO BASSO P.MODULA



**4319**  
KIT BINARIO TRIFASE UP LED



**18580**  
SCAT INCASSO+CORNIC  
P.MODULA



**18596**  
SCHERMO ALTO P.MODULA

## Spare parts



**415441001**  
LI-FEPO4 3.2V 3AH 18650