



Full Moon

FULL MOON EM TUTTOSCH 18W 4K



CE

Order code **75339**

EAN **8002219866714**




Technical specifications

Absorbed Power	18 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Autonomy	1.5h
Battery included	Yes
Battery type	Lithium-ions
Battery	Li-ion 3.6V 1.8Ah
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	4000 K
Photobiological risk	RG0
CRI color rendering	>80
Diameter	328 mm
Efficiency	80 lm/W
Flux SE	50 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.5
Glow wire strength	650 °C - 30s.
Luminaire flux	1440 lm
Luminous flux L70B10	71000 h
Luminous flux L70B50	100000 h
Luminous flux L80B10	45000 h
Luminous flux L80B20	50000 h
Luminous flux L80B50	62000 h
Luminous flux L90B10	25000 h
Luminous flux L90B50	29500 h
Number of Batteries	1
Voltage supply range (max)	265 V
Voltage supply range (min)	180 V

Mechanical specifications

Height	77 mm
Weight	0.57 Kg
Protection grade IP	IP44
Protection grade IK	IK03

Certifications and norms

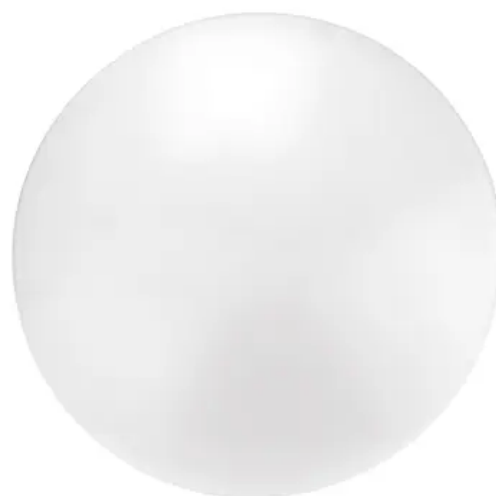

UK SI 2021 No. 1095, EN IEC 55015:2019
+ A11:2020, EN IEC 61000-3-2 :2019, EN
61547:2009, EN 62471:2008, EN IEC
60598-1:2021, EN 60598-2-22:2014 +
AC:2015 + AC:2016-05 + AC:2016-09 +
A1:2020, EN IEC 63000:2018, EN
62493:2010, EN 61000-3-3:2013